

## IR-Opflow PVDF Precision Flowmeters

### Corrosion resistant flow sensor

Manufactured in PVDF (polyvinylidene fluoride) the IR-Opflow Sensor is a precise volumetric flow meter.

Incoming liquid is forced into a twisting motion by spiral surfaces molded into the inflow section. This causes a miniature rotor to turn, virtually friction free. Each time the rotor spins, the blade interrupts a beam of infrared light generating a series of pulses that can be measured.

The precision of the IR-Opflow is not influenced by either the pressure or volume variations. The patented rotor design prevents air or gas bubbles from becoming trapped in the flowtube, making the IR-Opflow flowsensor not only rugged but extremely accurate.



### Typical features:

- Manufactured in PVDF (polyvinylidene fluoride)
- Measuring range: 0.1-120 l/min. through six sizes
- Threaded or Hose Barb connections
- Accuracy:  $\pm 1\%$  or  $\pm 3\%$  of measured value
- Repeatability:  $\pm 0.1\%$  of measured value
- Square wave Vdc frequency output
- Patented design and lightweight rotor minimizes wear, provides friction free rotational movement
- Mountable in any position

### Specifications:





Type	Flow range		K-factor<5cSt pulses/l	Output Hz
	lpm	(gpm)		
1	0.1-2.0	(0.03-0.53)	36,000	60-1200
2	0.3-9.0	(0.08-2.38)	8,000	40-1200
3	0.5-15.0	(0.13-3.96)	3,200	26.66-800
4	1.0-30.0	(0.26-7.93)	1,200	20-600
5	2.5-75.0	(0.66-19.8)	450	18.75-562
6	4.0-120.0	(1.06-32.0)	225	15-450

### Technical Specifications:

Accuracy:	10 Series $\pm 1\%$ of meas. value 30 Series $\pm 3\%$ of meas. value
Repeatability	$\pm 0.1\%$ of measured value
Flow range:	See specifications
Temperature range:	-40 to 85°C (-40° to 185° F)
Maximum pressure:	150 psi
Process connection:	NPT, BSP or flexible hose fitting, see table 1 and 2
Materials:	All wetted parts PVDF

### Electrical Specifications:

Power supply:	5 - 12 Vdc, 6 - 24 mA 8 - 24 Vdc, 18 - 30 mA
Pulse output:	Push-Pull
Max. load:	2k2 Ohm
Frequency:	15-1,200 Hz , see specifications
Signal cable:	3 feet, other lengths on request
Signal source:	Opto-electronic (infrared)

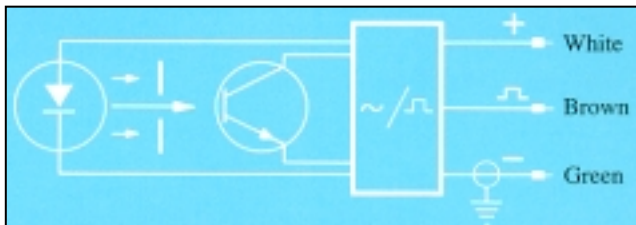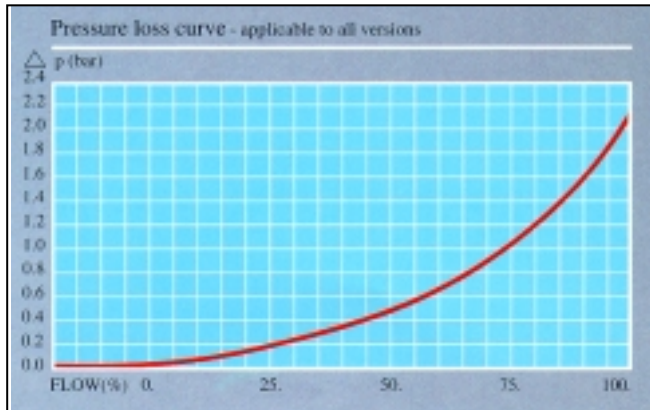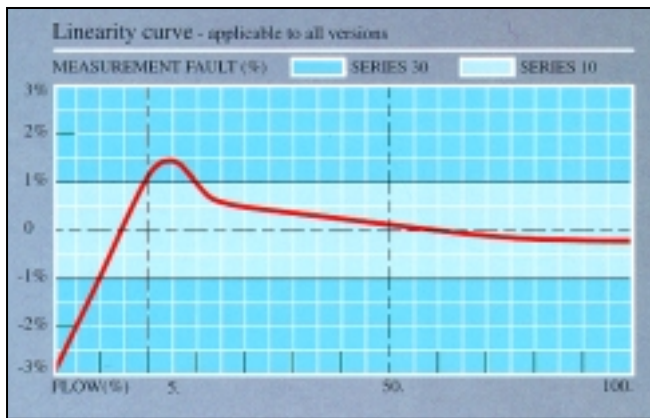

## Optional cartridge model features

- Turbine meter accuracy with convenience of non-intrusive unit for cleaning
- Rotor assembly removable for cleaning or replacement of flow tube
- Patented design with  $\pm 1\%$  or  $\pm 3\%$  accuracy
- Accuracy guaranteed when replacing cartridge
- Electronics unaffected by replacement

## Cartridge specifications:

Accuracy:	10 Series $\pm 1\%$ of meas. value 30 Series $\pm 3\%$ of meas. value
Repeatability:	$\pm 0.1\%$ of measured value
Flow range:	Type 1, 2 and 3
Temperature range:	-40 to 85°C (-40 to 185°F)
Maximum pressure:	150 psi
Process connection:	Flexible hose fitting, (o.d. 9mm)
Materials:	All wetted parts are PVDF

## Electrical specifications:

Power supply:	5 - 12 Vdc, 6 - 24 mA
Pulse output:	Push-Pull
Max. load:	2k2 ohms
Frequency:	26.66 - 1,200 H z, see specifications

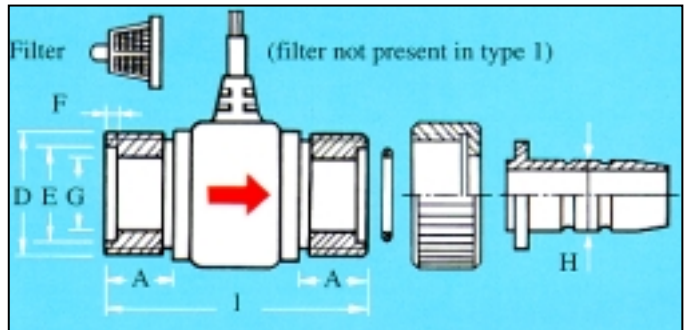




Table 1

Type	NPT or BSP				Dimensions (mm)			
	A	D	d	L	A	D	d	L
1	9.5	1/4"	6.5	39				
2	12.7	1/2"	13.0	47				
3	12.7	1/2"	13.0	47				
4	18.5	3/4"	17.0	63				
5	24.5	1 1/4"	29.0	80				
6	24.5	1 1/4"	29.0	80				

Table 2


Type	Flexible hose fittings				Dimensions (mm)					
	A	D	E	F	G	H	I	Tot L.		
1	9.0	M12x1.5	8.7	1.5	6.5	6.9	39	96		
2	12.0	M20x2	16.0	1.8	12.0	9.0	43	112		
3	12.0	M20x2	16.0	1.8	12.0	12.0	43	116		
4	16.0	M27x2	21.0	2.3	16.0	16.0	57	136		
5	16.5	BSP 1"pl.	29.4	1.6	24.5	19.5	80	182		
6	16.5	BSP 1"pl.	29.4	1.6	24.5	24.5	80	183		

## IR-Opflow Filters

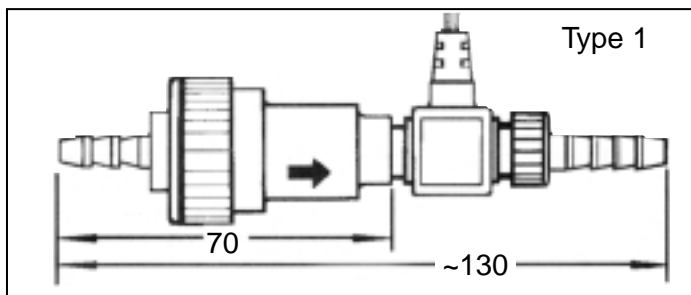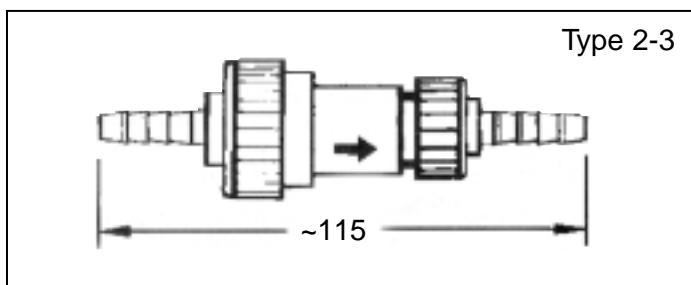

## Technical specifications:

Connections: Filter 1	(A) M12 x 1.5 F (fits flowmeter type 1) and flexible hose fitting; (B) Flexible hose fitting on both sides
Filter 2/3	Flexible hose fitting on both sides
Mesh width:	100 Micron
Pressure drop filter:	See graph
Filter housing material:	PVDF
Filter material:	PFA
'O'-ring material:	Viton

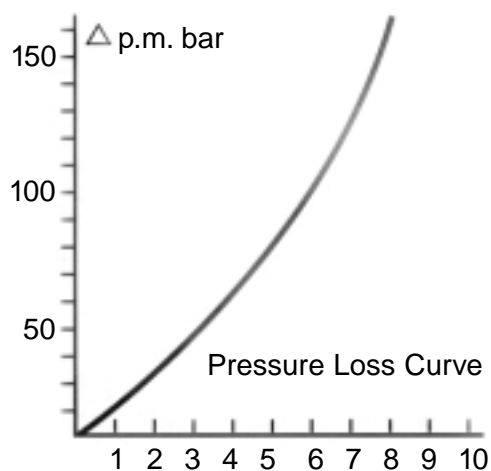

## Ordering information

IR-Opflow XX X X X X

### Accuracy

10 =  $\pm 1\%$  of measured value  
30 =  $\pm 3\%$  of measured value

### Output signal

0 = square wave pulse  
5 = sinusoidal pulse

### Type

1 = 0.1 - 2.0 lpm (0.03 - 0.53 gpm) \*)  
2 = 0.3 - 9.0 lpm (0.08 - 2.38 gpm) \*)  
3 = 0.5 - 15.0 lpm (0.13 - 3.96 gpm) \*)  
4 = 1.0 - 30.0 lpm (0.26 - 7.93 gpm)  
5 = 2.5 - 75.0 lpm (0.66 - 19.8 gpm)  
6 = 4.0 - 120.0 lpm (1.06 - 32.0 gpm)

### Supply voltage

0 = 5 - 12 Vdc, 6 - 24 mA  
1 = 8 - 24 Vdc, 18 - 30 mA

### Process connection

N = NPT  
H = Flexible hose fitting  
B = BSP  
S = Metric Thread

\*) Available in cartridge design, "H" only

### Examples:

100.10H  
 $\pm 1\%$ , square wave, type 1, 5 - 12 Vdc, Hose barbs

300.41N  
 $\pm 3\%$ , square wave, type 4, 8 - 24 Vdc, NPT